


CONCENTRIC-LAY-STRANDED ALUMINUM CONDUCTOR, ZINC COATED (GALVANIZED) STEEL REINFORCED (ACSR)

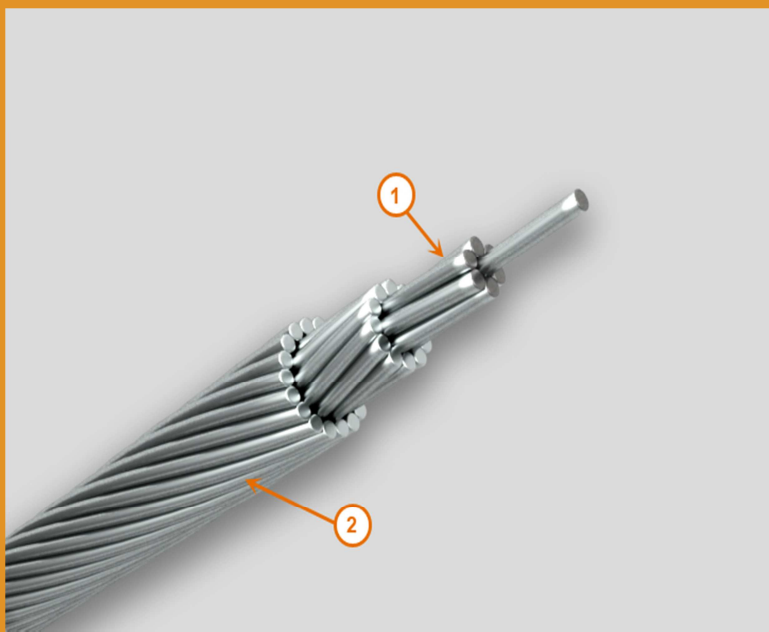

Description:

1. Concentric stranded zinc coated steel core
2. Concentric-lay-stranded H19 1350 aluminium conductor

Application:

- Overhead transmission circuits
- Overhead distribution circuits

Features:

- Light weight
- High tensile strength

Special Features:

- Easy to install

Standards:

- ASTM B232-B232M

Maximum Conductor Temperature:

- Continuous operation 75°C
- Emergency 94°C

Wiring Method:

- Aerial

Packing:

- Wooden Reel

How to Order:

- ACSR, size, code word, product number and weight.

CONCENTRIC-LAY-STRANDED ALUMINUM CONDUCTOR, ZINC COATED (GALVANIZED) STEEL REINFORCED (ACSR)



Product number	Size (AWG-kcmil)	Code Word	Steel core cross-section (mm ²)	Conductor cross-section (mm ²)	Steel core strand number	Conductor strand number	Steel core weight (kg/km)	Conductor weight (kg/km)	Nominal overall diameter (mm)	Total weight (kg/km)	Standard Net Reel Weight (kg)	Rated Strength (kN)
2600000BJA	4	SWANATE	5,37	21,16	1	7	42,58	57,06	6,48	100	565	10,52
26000003WA	2	SPARROW	5,61	33,64	1	6	44,50	91,22	7,96	136	565	12,71
26000003XA	2	SPARATE	8,55	33,64	1	7	67,85	90,83	8,21	159	565	16,23
260000024A	1/0	RAVEN	8,92	53,48	1	6	70,81	145,27	10,05	216	565	19,53
260000026A	2/0	QUAIL	11,23	67,44	1	6	89,15	182,88	11,27	272	565	23,63
26000003DA	3/0	PIGEON	14,17	85,03	1	6	112,41	230,61	12,66	343	565	26,52
26000003EA	176,9	DOTTEREL	52,27	89,64	7	12	414,83	241,30	15,31	655	565	77,14
2600000BFA	203,2	BRAHMA	91,90	10,96	19	16	729,26	274,66	17,98	1 003	565	126,6
26000003GA	4/0	PENGUIN	17,87	107,2	1	6	141,82	290,94	14,22	433	565	37,23
26000003IA	266,8	WAXWING	7,50	135,2	1	18	174,77	371,23	16,16	545	2 000	30,77
2600000BBA	266,8	PARTRIDGE	22,02	135,2	7	26	59,56	370,67	15,37	430	2 000	50,39
26000003LA	336,4	MERLIN	9,46	170,5	1	18	220,46	467,07	18,16	686	2 000	38,40
2600000BDA	336,4	LINNET	27,78	170,5	7	26	75,05	467,83	17,26	542	2 000	62,88
26000003ZA	397,5	CHICKADEE	11,19	201,4	1	18	259,94	552,60	19,74	811	2 000	44,15
2600000BEA	397,5	IBIS	32,76	201,4	7	26	88,79	552,60	18,76	641	2 000	72,69
260000043A	477,0	PELICAN	13,43	241,7	1	18	312,1	663,09	21,64	973	2 000	52,62
2600000BLA	477,0	HAWK	39,33	241,7	7	26	106,57	663,25	20,56	769	2 000	86,96
2600000B3A	556,5	PARAKEET	36,54	282,0	7	24	289,98	775,69	23,05	1 063	2 000	88,29
260000036A	636,0	GROSBEAK	52,45	322,3	7	26	416,19	884,76	25,00	1 298	2 000	112,4
26000002IA	795,0	DRAKE	65,60	402,8	7	26	520,61	1 105,95	27,97	1 623	2 000	140,5
26000002JA	795,0	TERN	27,84	402,8	7	45	220,95	1 110,95	26,83	1 326	2 000	98,55
26000002PA	954,0	RAIL	33,44	483,4	7	45	265,38	1 332,90	29,40	1 592	2 589	115,5
2600000B1A	954,0	CARDINAL	62,65	483,4	7	54	497,15	1 328,97	30,20	1 824	2 589	150,7
26000002TA	1 033,5	ORTOLAN	36,18	523,7	7	45	538,37	1 439,40	31,43	1 975	2 589	123,5
2600000B2A	1 033,5	CURLEW	67,84	523,7	7	54	287,13	1 443,60	30,59	1 724	2 589	163,2
260000028A	1 113,0	BLUEJAY	39,03	564,0	7	45	309,73	1 556,42	31,77	1 857	2 806	132,9

Notes:

- To get information about products not included on this sheet, please contact our Technical Assistance Department.
- These data may vary due to manufacturing tolerances.