


## STRANDED MULTI-CONDUCTOR CABLE

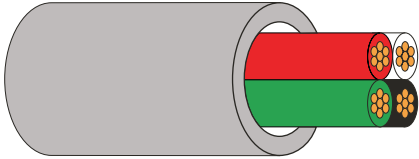

**DESCRIPTION:**

- Stranded bare copper conductor 22, 18, 16, or 14 AWG
- Semirigid PVC insulation
- PVC Jacket
- CMR / CL3R / FPLR
- Sunlight resistant

**APPLICATION:**

Burglar alarm, audio control systems, limited circuits.

Standard lengths of 1000 ft or 500 ft, in reels or boxes.

**SPECIFICATIONS:**

NEC 725/800 UL-44 ETL - c(ETL) **RoHS**

Product Code	Gauge	Number of Conductors	Insulation Thickness	Jacket Thickness	Overall Diameter	Net Weight Lb/mft
656050	22	2	0.006"	0.0135"	0.107"	8
656052	22	4	0.006"	0.0135"	0.139"	15
◆ 656054	22	6	0.006"	0.0135"	0.155"	20
◆ 656056	22	8	0.006"	0.0135"	0.185"	26
◆ 656058	22	10	0.006"	0.0135"	0.242"	32
◆ 656059	22	12	0.006"	0.0135"	0.273"	37
656021	18	2	0.009"	0.0135"	0.148"	17
656023	18	4	0.009"	0.0135"	0.187"	29
◆ 656025	18	6	0.009"	0.0135"	0.213"	42
656018	16	2	0.010"	0.0175"	0.183"	25
656020	16	4	0.010"	0.0175"	0.233"	48
656016	14	2	0.020"	0.020"	0.248"	42
◆ 656017	14	4	0.020"	0.020"	0.318"	80

Conductor Gauge AWG	Conductor Construction Wire/AWG	Conductor Resistance D.C. Maximum Ω/kft @ 20°C	Temperature Rating °C	Voltage Rating
22	7/30	16.3	60°C	300 V
18	19/30	6.55	60°C	300 V
16	26/30	4.00	60°C	300 V
14	41/30	2.60	60°C	300 V

◆ Non-Stocked item, subject to minimum quantity.

\*All values are nominal, and subject to manufacturing tolerances.