


Thermostat / Control Cables

THERMOSTAT CABLE

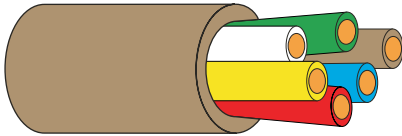

DESCRIPTION:

- Solid bare copper conductors 20 and 18 AWG
- Semirigid PVC insulation
- Sunlight resistant brown PVC Jacket
- CL2R

SPECIFICATIONS:

NEC 725 UL-13 ETL - c(ETL)

RoHS

APPLICATION:

Thermostat cable for, air condition control, heating control, intercom systems.

STANDARD LENGTH

Standard lengths of 500 ft or 250 ft reels. Brown in stock, white available with minimum purchase requirement.

Product Code	Gauge	Number of Conductors	Insulation Thickness	Jacket Thickness	Overall Diameter	Net Weight Lb/kft
666510	18	2	0.0075"	0.013"	0.126"	14
666511	18	3	0.0075"	0.013"	0.129"	20
666512	18	4	0.0075"	0.013"	0.161"	27
666513	18	5	0.0075"	0.013"	0.185"	33
666514	18	6	0.0075"	0.013"	0.185"	40
666516	18	8	0.0075"	0.013"	0.220"	52
666520	20	2	0.006"	0.013"	0.105"	10
666521	20	3	0.006"	0.013"	0.106"	13
666522	20	4	0.006"	0.013"	0.131"	18
666523	20	5	0.006"	0.013"	0.150"	22
◆ 666524	20	6	0.006"	0.013"	0.150"	26
◆ 666525	20	7	0.006"	0.013"	0.210"	31
◆ 666527	20	9	0.006"	0.013"	0.224"	38

Conductor Gauge AWG	Conductor Resistance D.C. Maximum Ω /kft @ 20°C	Temperature Rating °C	Voltage Rating
20	10.12	60	300 V
18	6.40	60	300 V

◆ Non-Stocked item, subject to minimum quantity.

*All values are nominal, and subject to manufacturing tolerances.